

INSTALLATION MANUAL

7813L

ecostrip



80
CRI



24V DC | SMD 2835 | 60LEDs/m | 3W/m | IP20

Requires 24V DC driver.
Supplied in 30m roll with double face
adhesive tape.
Can be connected in full length.

Cut every 10cm (6-LED segment)



one
LIGHT

A. CUT:


The LED strip can be cut every 10cm (6-LED segment) at the clearly marked positions. Cut carefully at the desired length by using a sharp pair of scissors.

B. INSTALLATION:

Remove the 3M double face adhesive tape from the LED strip gradually during installation and fix into the required position.

C. CONNECT:

Connect the LED strip to the LED driver's output. Please check the polarities when you connect it (red "+", black "-").

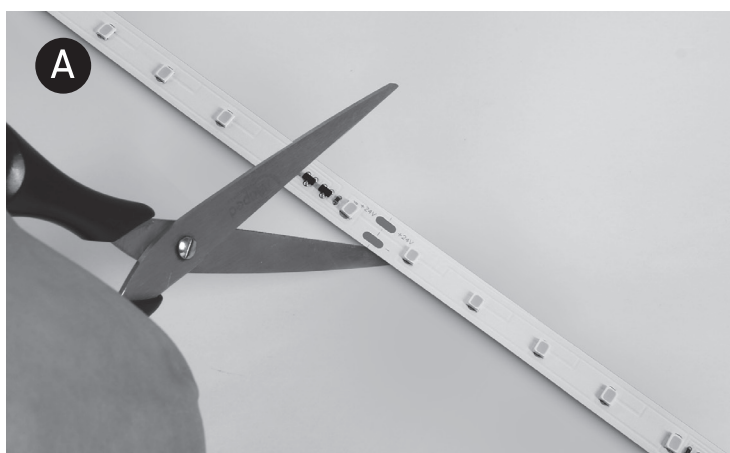

Warnings:

1. The mounting surface must be clean, dry and free from dust or grease.
2. Make sure that the product is installed properly before connecting to electricity.
3. Do not bend, fold or twist the LED strip.
4. Do not bend to install in corners.
5. Do not put excessive pressure on surface of LED strip.
6. Do not cover LED strip with any materials.
7. Do not install in ambient temperatures below -10°C or exceeding 45°C .
8. Always handle the LED strip with care.
9. The LED strip should not be exposed to direct sunlight.
10. LED strips with different batch numbers may have slight variations in colour consistency ($\text{CCT}\pm 150\text{K}$).
11. Maintenance and installation should only be carried out by a professional electrician.