


DATASHEET | Ultimate – Adapter 3 Circuit with concealed driver

PRO-04750



Product code White (RAL 9010)	PRO-04750-W
EAN code White	8719747931974
Product code Grey (RAL 7040)	PRO-04750-S
EAN code Grey	8719747931981
Product code Black (RAL 9011)	PRO-04750-B
EAN code Black	8719747931998
Main materials	PC UL94V0 + Copper
Inner box / Outer box	5 / 150
Net weight per piece	125 g
Rated voltage per circuit	120-230V
Max pull strength	100N

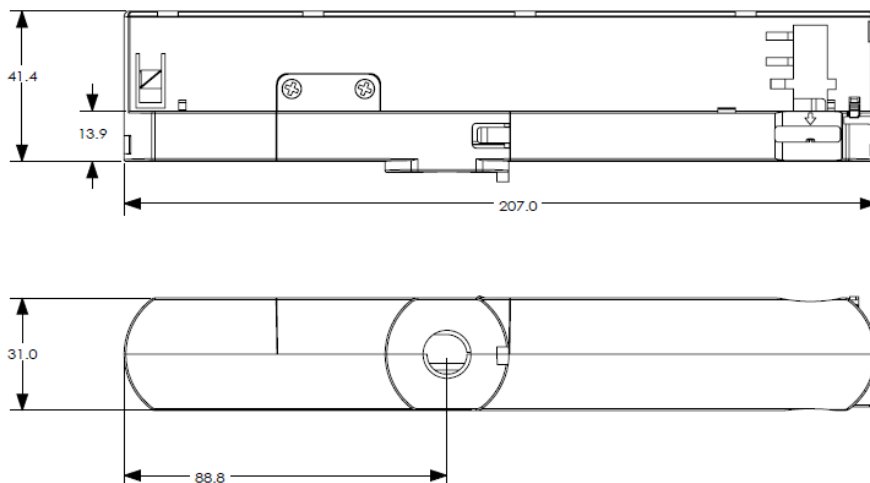

Specifications

Flicker Free
 Output: 16V-38Vdc, 45Vdc max.
 PF>0,9, THD<15%
 Unloaded protection
 Short circuit protection
 Overvoltage protection
 Certificate: ENEC/UL/SAA
 Lifetime: 50.000hours

PRO-04750	1	2	Power
600mA	○	○	24W
650mA	●	○	26W
700mA	○	●	28W
750mA	●	●	30W

Excluding nipple

