

Flexiled Led Tape




Product Information

IP RATING OPTIONS		- IP20	- IP65	
WATTAGE OPTIONS		- 14W (PER METRE)		
CCT OPTIONS	2000K	2200K	2700K	3000K
DIMMING OPTIONS		- NON DIMMABLE - DIMMABLE - DALI		
LUMEN OUTPUT	2000K	- 1037lm		
	2200K	- 1110lm		
	2700K	- 1263lm		
	3000K	- 1330lm (PER METRE)		
VOLTAGE		- 24V		
BEAM ANGLE		- 120°		
WIDTH		- 10mm		
CUT INTERVAL		- 33.3mm		
ACCESSORY OPTIONS		- STANDARD PROFILE KIT (LD-1602) - SHALLOW PROFILE KIT (LD-1606)		
EACH PROFILE KIT CONTAINS		- 2M HOUSING PROFILE - 2M MOUNTING PROFILE - 2M OPAL DIFFUSER - X2 END CAPS - X2 MOUNTING CLIPS		

FLEXILED PROFILE DIMENSIONS

SHALLOW

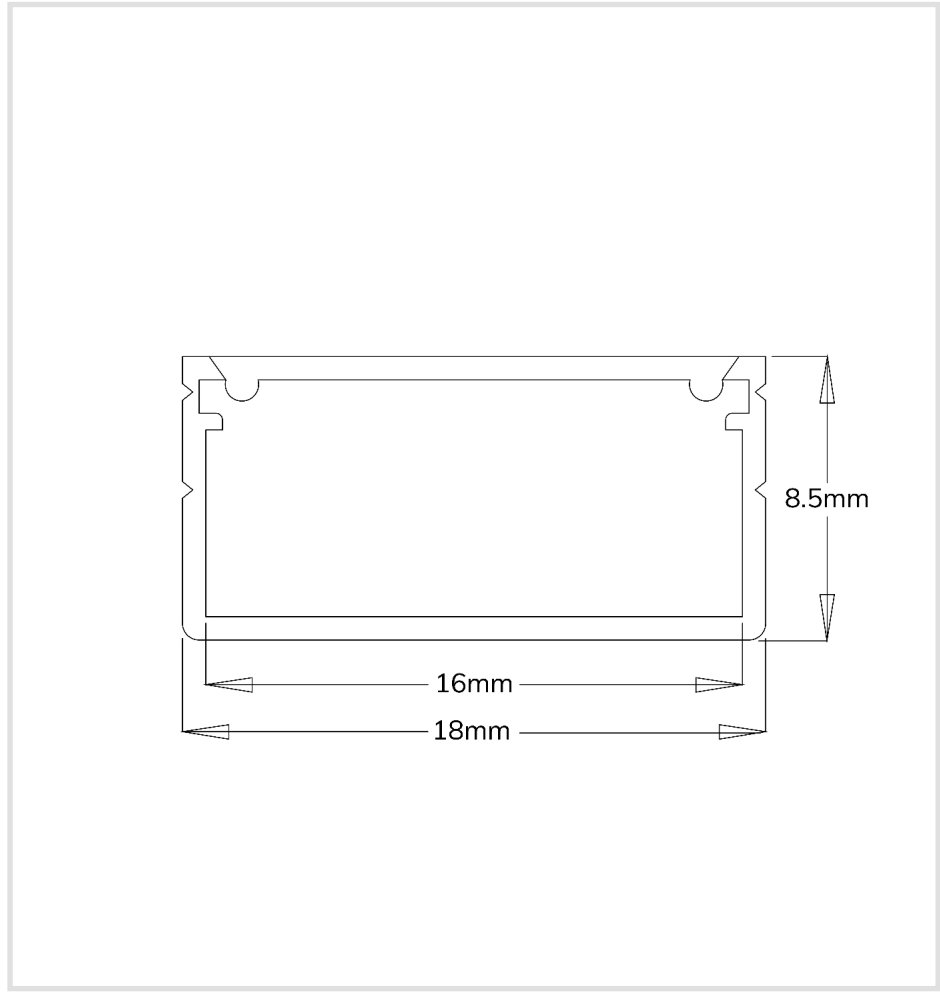

STANDARD

