


Direct/Indirect LED Linear Light

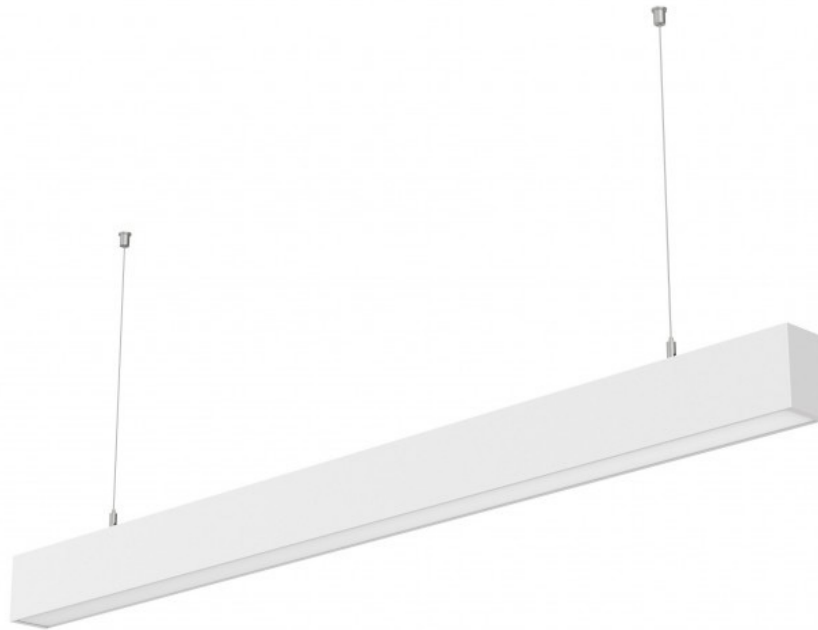

This SERA STL441 Direct/Indirect LED linear lighting is the latest in the Sera LED Linear Lighting range and shines natural white (4000K) LED light up and down. Complete with 1.5m suspension kit, and an integrated DALI LED Driver.

Specifications

- Fitting supplied with 1.5m suspension kit
- Lengths: 1500mm and 1200mm
- Natural White (4000K)
- DALI Integrated LED Driver
- Aluminium profile finished in White (RAL 9010)
- Profile 55mm(w) x 80mm(h)
- Beam angle 110°
- IP20 Rating
- PF > 0.95
- CRI > 80

Model Number	Length (mm)	W	CCT	Lumens	Voltage
STL441-1200-4000	1200	27 Direct/10 Indirect	4000K	2565 Direct / 950 Indirect	220V-240VAC
STL441-1500-4000	1500	34 Direct/10 Indirect	4000K	3230 Direct / 950 Indirect	220V-240VAC

