

### Flexible Accent Lighting Solution

The Neon FlexiLED 16 Anti-Glare delivers high-performance, visually comfortable lighting for both indoor and outdoor environments. Its engineered honeycomb diffuser significantly reduces glare while maintaining bright, uniform illumination. Designed with flexible multidirectional bending, it easily adapts to curved, angled, or complex architectural surfaces, ensuring smooth and efficient installation. Built with advanced silicone extrusion and an integrated honeycomb optical structure, it offers exceptional durability, impact resistance, and outstanding weather protection.




### PRODUCT INFORMATION


Colour temperatures	2000K / 2200K / 2700K / 3000K / 4000K
Dimming options	Non-Dimmable / Mains Dimmable / DALI / 0-10V / DMX / Casambi / Bluetooth / Wi-Fi * Controller required
Beam angle	50°
CRI	90
Lifetime	50000hrs L70B50
Warranty	5 Years
Power	14W/m
Input Voltage	24V
Delivered Lumens	605lm/m - 710lm/m (See chart)
Efficacy	Up to 51lm/W
Material	Silicone
IP Rating	IP67
UGR	<19
Operating Ambient Temperature	-20°C ~ 45°C
Max. Length	5m
Cutting interval	Free-cutting
Bending	Dual Bend

### DIMENSIONS


#### Neon Strip




#### Fixing Brackets

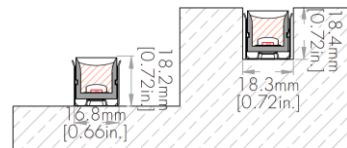


#### Aluminium Channel

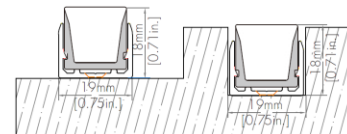


#### Bendable Bracket

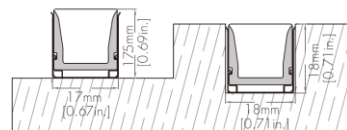

#### Rear Cable Entry

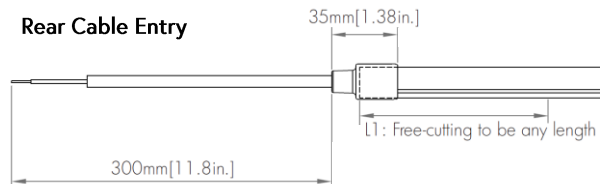





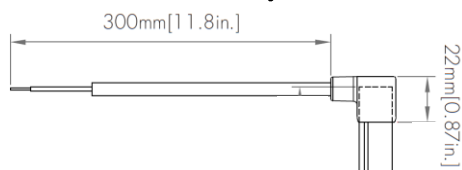

#### Side / Bottom Cable Entry



## SPECIFICATION


Power	Input Voltage	Colour Temperature	Lumen Output
14W/m	24V	2000K	605lm/m
		2200K	618lm/m
		2700K	639lm/m
		3000K	653lm/m
		4000K	710lm/m

## ACCESSORIES



Mounting Accessories			Power cable feed DIY kit		
Fixing Brackets	Aluminium Channel	Bendable Bracket	Rear feed	Side feed	Bottom feed
					

## BENDING RADIUS

Can be top-bend

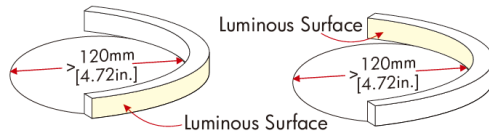

Can be side-bend

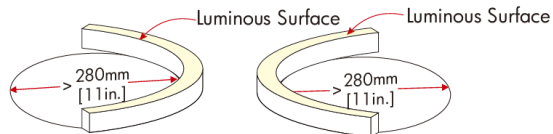

▲ Max. Twist Angle is 360° per 1000mm[39.4in.]

## SPECIFICATION CODE AND OPTIONS

CODE FORMAT EXAMPLE: LI-00116-BK-14-930-HC-IP67

Type	Colour	Wattage	Colour Temperature	Anti-Glare Accessory	IP Rating
FlexiLED 16 Anti Glre LI-00116	Black BK	14W/M 14	2000K 920	Honeycomb HC	IP67 IP67
			2200K 922	Grille GR	
			2700K 927		
			3000K 930		
			4000K 940		

## ACCESSORIES SPECIFICATION CODES

Product Code	Description
LD-00016	Aluminium Channel - 1m
LD-00016-FB	Fixing Brackets - 2 pcs per set
LD-00016-BB	Bendable Bracket - 1m
LD-00016-ASET-REAR	Rear feed cable accessory set – Cable 300mm + endcaps + 10ml silicon glue
LD-00016-ASET-SIDE	Side feed cable accessory set – Cable 300mm + endcaps + 10ml silicon glue
LD-00016-ASET-BOTTOM	Bottom feed cable accessory set – Cable 300mm + endcaps + 10ml silicon glue

