

Engineered for precision. Designed for impact.


The Tubular 75 LED track light delivers exceptional performance and refined design for contemporary retail lighting applications. Engineered with precision optics and a high Colour Rendering Index (CRI 90), it ensures true-to-life colour representation — essential for showcasing merchandise and enhancing material finishes in any retail or display environment. Its integrated driver and compact, low-profile housing allow for seamless installation on standard track systems, maintaining clean ceiling lines and a minimalist aesthetic. Available in multiple beam angles and finishes.



PRODUCT INFORMATION

Colour temperatures	2700K / 3000K / 4000K
Beam angle options	24° / 34° / 50°
Dimming options	Non-Dimmable / Mains Dimmable / DALI / Casambi / Bluetooth
CRI	90
Lifetime (LED)	50000hrs
Lifetime (Driver)	50000hrs
Power	14.0W / 18.2W / 22.1W / 26W / 29.8W
Delivered Lumens	1528lm – 3398lm (See chart)
Efficacy	Up to 130lm/W
Material	Aluminium body
Colour	Black / White / Custom RAL
IP Rating	IP20
Warranty	5 Years
TM66	2.4

DIMENSIONS

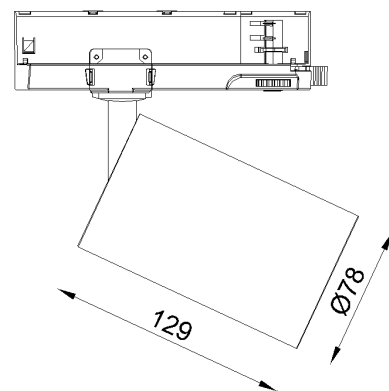

Enigma Lighting partner with *Ecologi*

ENGINE SPECIFICATON

2700K

Power Setting	Drive Current	Circuit Power	Initial Lumens	Engine Lumens		
				24°	34°	50°
16	400mA	14.0W	2081	1703	1696	1528
21	500mA	18.2W	2560	2095	2086	1879
25	600mA	22.1W	3023	2474	2463	2219
26* / 29	700mA	26.0W	3469	2839	2827	2546
32* / 33	800mA	29.8W	3899	3191	3177	2862

3000K

Power Setting	Drive Current	Circuit Power	Initial Lumens	Engine Lumens		
				24°	34°	50°
16	400mA	14.0W	2126	1740	1732	1561
21	500mA	18.2W	2615	2140	2131	1919
25	600mA	22.1W	3088	2528	2516	2267
26* / 29	700mA	26.0W	3544	2901	2888	2601
32* / 33	800mA	29.8W	3983	3260	3245	2924

4000K

Power Setting	Drive Current	Circuit Power	Initial Lumens	Engine Lumens		
				24°	34°	50°
16	400mA	14.0W	2216	1814	1806	1627
21	500mA	18.2W	2725	2230	2220	2000
25	600mA	22.1W	3218	2634	2622	2362
26* / 29	700mA	26.0W	3693	3023	3009	2711
32* / 33	800mA	29.8W	4151	3398	3382	3047

* Power setting 26 and 32 are for mains dimmable variant exclusive.

AVAILABLE FINISHES

White		Black		Custom	
Black Baffle	Gold Baffle	Black Baffle	Gold Baffle	Powder Coat	Plated Finish
					

ACCESSORIES

Honeycomb



SPECIFICATION CODE AND OPTIONS

CODE FORMAT EXAMPLE: TS-00044-WB-29-930-24-NON+HC

Bezel Type	Colour	Power Setting	Colour Temperature	Beam Angle	Dimming	Accessories
Tubular 75 TS-00044	White Body Black Baffle WB	16	CRI90 2700K	24°	Non-Dimmable	Honeycomb HC
		16	927	24	NON	
	White Body Gold Baffle WG	21	CRI90 3000K	34°	Mains Dimmable	
		21	930	36	LTE	
	Black Body Black Baffle BB	25	CRI90 4000K	50°	DALI	
		25	940	50	DAL	
	Black Body Gold Baffle BG	Mans Dim 26*	Tunable White		Casambi	
26		9TW		CAS		
Custom finish XX	29	Dim to Warm				
	29	9DW				
	Mans Dim 32*					
	32					
	33					
	33					

* Power setting 26 and 32 are for mains dimmable variant exclusive.