

ArcCove tm






Client: _____
 Project: _____
 Specifier: _____
 Type: _____ Qty: _____



FEATURES:

- Input Voltage: 24V DC Via ArcCove Power
- Power consumption: STD=5W - HIGH=10.8W
- Light Source: 10 x MC LED's
- Delivered Lumen: STD=95lm - HIGH=171lm
- Projected LED Life: 50,000 Hrs
- Lumen Output Per Foot: 95lm Std - 171 High Power
- Effect: Pixel control (2 segments of 5 LED's)
- Control: DMX Controller
- Housing: Moulded plastic and Transparent Rail
- Fixing Method: Fixing holes or Mounting Rail
- IP Rating: IP2X
- Operating Ambient Temp: -20°C/+40°C (-4°F/+104°F)
- Certification: ETL / cETL, CE, RoHS
- 5 Year Warranty

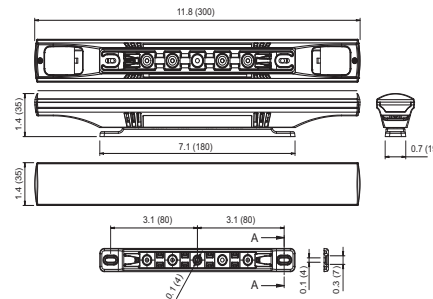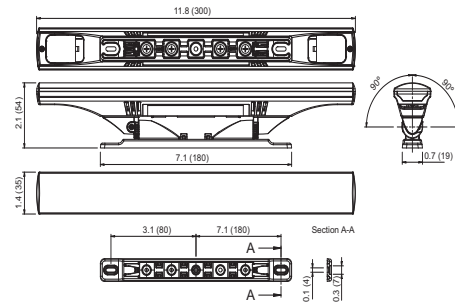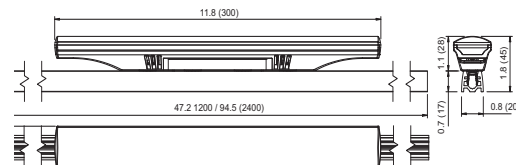


How To Order	GROUP	VARIANT	SIZE	COLOUR	OPTIC	FINISH	OPTIONS
ARC	1	2	3	4	5	6	7
	CVE	RIL	10	RGB - Red, Green, Blue	NN	S - Silver	CUS - Custom
		STD		SW - Smart White		B - Black	MTP - Multiple
		LPR		PW - Pure White		W - White	CCL - Custom Cable Length
						C - Custom	
Example	ARCCOVE STANDARD 10 RGB NON OPTIC SILVER CUSTOM CABLE LENGTH						
ARC	CVE	STD	10	RGB	NN	S	CCL

Colour temperature to be specified at time of order


ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 9RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: [954] 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Connection Scheme:

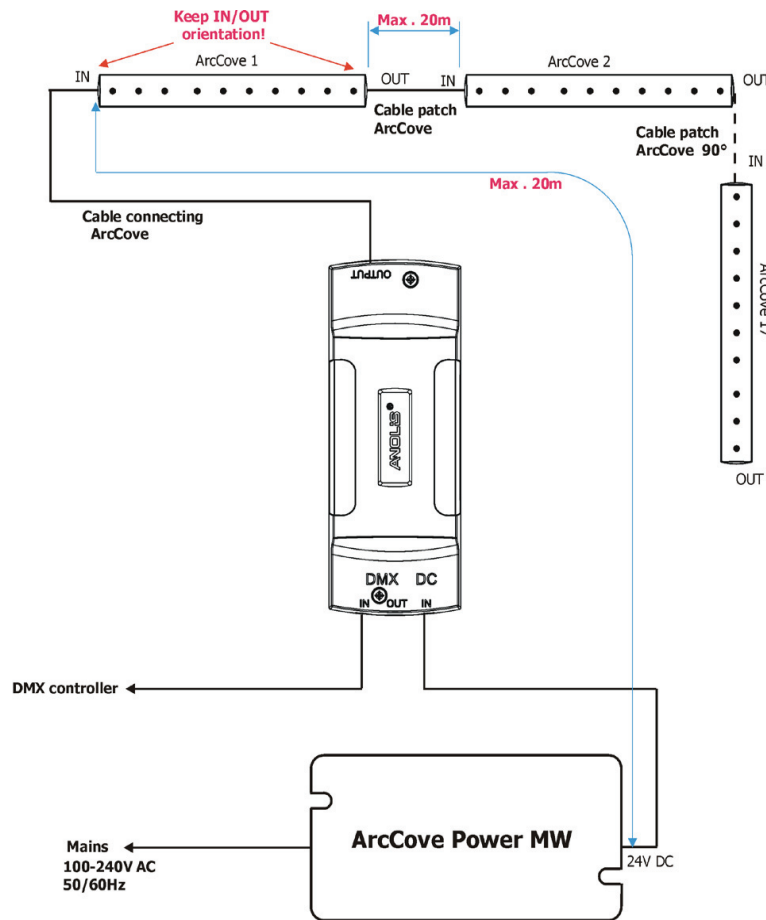

DataBox connection:

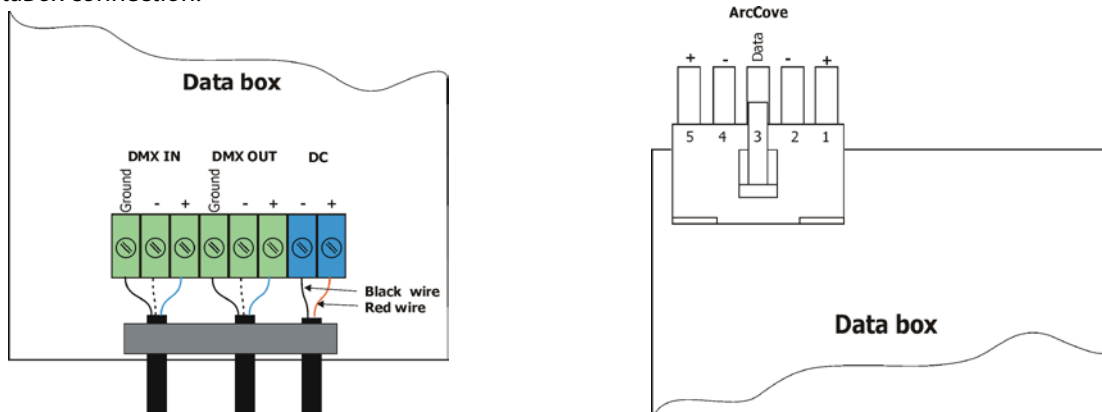

ROBE lighting s.r.o., Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E-mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E-mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: [954] 680-1910 - E-mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E-mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E-mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E-mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E-mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E-mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Product Specification:

Electrical	Input Voltage		24V DC
	Power Consumption		Standard Mode=5W - High Output Mode=10.8W
Optical	Light Source		10 x RGB MC LED's
		RGB	
		PW	2700K, 6500K
		SW	2700K-6500K
	Colour Variants		RGB, Pure White, Smart White
Beam Angle		Non Optic	
Projected Lumen Maintenance		50,000 hrs (L70@ 25°C / 77°F)	
Control	Wireless DMX (Optional Accessory)		N/A
	Control System		ArcCove DataBox
	Power Supply		ArcCove Power
	Stand Alone Control		N/A
Physical	Width x Height x Depth	Inches	11.81 x 1.38 x 2.14, 1.77, 1.38
		mm	300 x 35 x 54.3, 45, 35
	Weight	lbs	0.33
		kg	0.16
	Housing		Moulded Plastic and Transparent Cover
	Fixture Cable and Connections		5 Wire Flat Ribbon Cable: UL2468 AWG 18/5C - In and Out Connectors
	Fixing Method		Standard / Low Profile / Rail
	Adjustability		+/-90°
	IP Rating		IP2X
	IK Rating		IK**
	Cooling System		Convection
	Operating Ambient Temperature		-20°C / +40°C (-4°F / +104°F)
Operating Temperature		+65°C @ Ambient +40°C (+149°F @ Ambient +104°F)	
Certification	Listings		ETL / cETL, CE, RoHS

Supplied in Kit form consisting of 17 x ArcCoves + 1 x ArcCove Power and 1 x ArcCove Data Box

Subject to change without notice - please contact Anolis for clarification

Accessories	Description
	Allen Key (Included)
	R12 - 1.2m Rail
	R24 - 2.4m Rail
	C15 - Cable Patch 15cm
	C12 - Cable Patch 90°
	C1 - Cable 1m
	C2 - Cable 2m
	C5 - Cable 5m
	C10 - Cable 10m




ROBE lighting s.r.o, Palackeho 416 757 01 Valasske Mezirici, Czech Republic. Tel: +420 571 751 500 - Fax: +420 571 751 515 - E.mail: info@anolis.eu
 UK: Anolis UK, 3 Spinney View, Stone Circle Road, Round Spinney Ind Est, NN3 8RF, Northampton, United Kingdom. Tel: +44 1604 741000 - Fax: +44 1604 741041 - E.mail: info@anolis.co.uk
 USA: Anolis Lighting, 12349 SW 53rd Street, Suite 202, Cooper City, Florida 33330, U.S.A. Tel: +1 844 426 6547 - +1-844-4 ANOLIS - Fax: [954] 680-1910 - E.mail: info@anolislighting.com
 AUS: Anolis Australia, 28 Expo Court, Ashmore, 4215, Queensland, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 AUS: Anolis Australia, 5 Phillip Court, Port Melbourne, 3207, Victoria, Australia. Tel: +61 7 5509 4633 - Fax: +61 7 5509 4677 - E.mail: info@anolis.com.au
 Asia and Pacific: Anolis Asia and Pacific, 12 New Ind Road, #02-05 Morningstar Centre, S-536202, Singapore. Tel: +65 6280 8558 - Fax: +65 6280 2896 - E.mail: asiapacific@anolis.eu
 Middle East: Anolis Middle East, Office Nbr 507 5th Floor, Al Asmawi Building DIP 1, Dubai, UAE. Po Box: 391 898 - Tel: +971 4 885 3223 - E.mail: middleeast@anolis.eu
 Russia and CIS: Taganskaya str. 26-1-72, 109004 Moscow, Russia. Tel: +7 495 504 9569 - E.mail: russia@anolis.eu
 Central and South America: Galicia 1198 ap 303, 1100, Montevideo, Uruguay. Tel: +5982 900 67 47 - E.mail: Latam@anolis.eu

www.anolis.eu | www.anolislighting.com

Photometric Data:

For foot Candles divide lux by 10.7


Standard Power - Non Optic

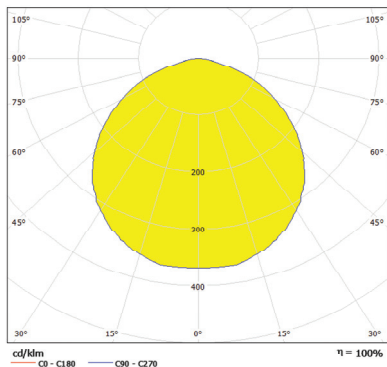

Distance [m]	Cone Diameter [m]	E(P) [lx]	E(C) [lx]	Beam Diameter [m]
0.5	1.42	54.8	13	1.42
1.0	2.84	13.7	3	2.84
1.5	4.25	6.2	1	4.25
2.0	5.67	3.4	1	5.67
2.5	7.09	2.2	1	7.09
3.0	8.51	1.5	1	8.51

Total Luminous Flux: 95lm

High Power - Non Optic

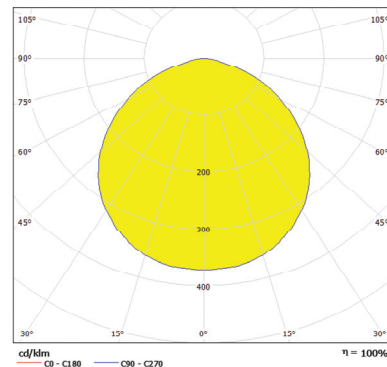

Distance [m]	Cone Diameter [m]	E(P) [lx]	E(C) [lx]	Beam Diameter [m]
0.5	1.40	54.5	25	1.40
1.0	2.80	13.6	6	2.80
1.5	4.21	6.1	3	4.21
2.0	5.61	3.3	2	5.61
2.5	7.01	2.1	1	7.01
3.0	8.41	1.5	1	8.41

Total Luminous Flux: 171lm